

CD12M/0B-020A5

connectors




Micro Detectors

Italian Sensors Technology



Indicative image

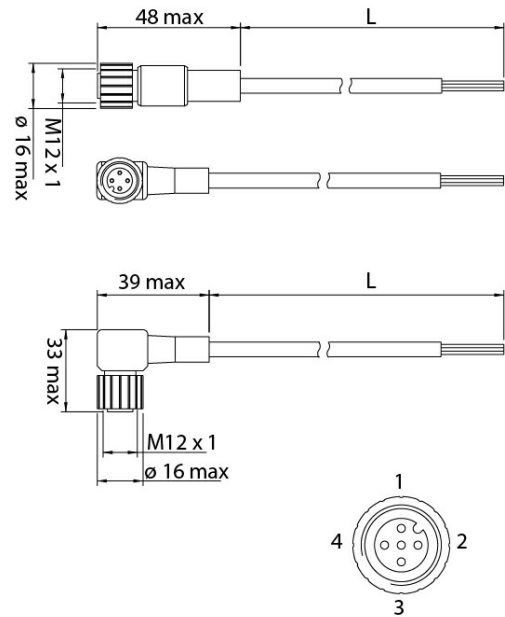

Electrical data

Nominal current	4 A
Led	No
Wires	4
Rated impulse voltage	2,5 kV
Nominal voltage	Max. 250 V ac/dc

Mechanical data

Tightening torque	0,6 Nm
Operating temperature	-5°C...+80°C (flexible installation) -20°C...+80°C (fixed installation)
1	2
Plug	M12
Outer diameter	$\varnothing 4,7$ mm $\pm 5\%$
Head type	Axial
Gasket material	PUR
Wire isolation	PVC
Conductors section	0,25 mm ² (32 x 0,10 mm ²)

Test/Approvals

Degree of protection	IEC IP67
----------------------	----------

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

BN/1

WH/2

BU/3

BK/4

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

19/09/2019 13:33:37