

CF/RC6-20

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

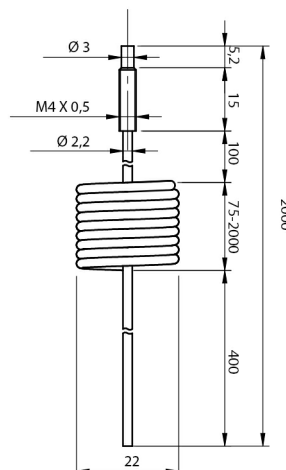

Detection properties

Distance with SSF	100 mm
Distance with FS1	100 mm
Distance with FX3	500 mm
Distance with FX4	500 mm
Distance with F1R	350 mm

Application

Function Principle Through-beam P/R

Description Plastic optical fibres

Mechanical data

Operating temperature -40°C....+70°C (posa fissa)

1 2

1 mm 1 mm spiralata

M4 con sleeve M4

vetro, ETM, inox PE, plastic

ottone nichelato nickel-plated brass

Test/Approvals

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@microdetectors.com

date of printing

06/05/2020 15:30:18